





**QUALITY CONSTRUCTION AND COMPONENTS...
THE HALLMARK OF PDR 4" AND 6" KOOL-CEL SYSTEMS!**



These pumps are heavy duty centrifugal, self priming type featuring high volume and low head pressure performance.

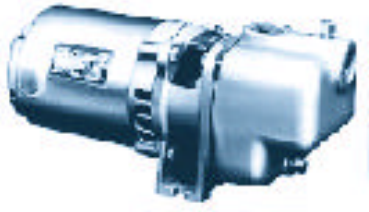

These pumps are submersible type with cast iron housing, polypropylene base and polycarbonate cover. They include a lifetime oil supply and non-clog pumping head and impeller.

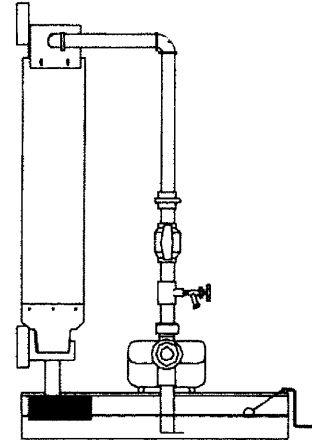

The plumbing package is designed for use with all the pumps for the Kool-Cel systems and includes the necessary plumbing fittings and valve to complete the installation from the sump to the distributor and also contains the water strainer and float valve.

The sump tank cover and tank fittings are furnished by others and should be sized to provide 3/4 gallon per square foot of 4" pad area and 1 gallon per square foot of 6" pad area.

MODEL	TYPE	HP	VOLTAGE/ PHASE	CAPACITY AT 10' HEAD	TOTAL SYSTEMS LENGTH	
					4"	6"
#30	Centrifugal	1/3	115/230/1	42 GPM	70'	55'
#60	Centrifugal	1/2	115/230/1	55 GPM	100'	80'
#15S	Submersible	1/4	115/1	29 GPM	40'	35'
#30S	Submersible	1/3	115/1	42 GPM	70'	55'
#60S	Submersible	1/2	115/1	63 GPM	100'	80'

The pumps should be sized to provide 1/2 gallon per minute for 4" and 3/4 gallon per minute for 6" of flow per linear foot of pad to insure adequate wetting.